



EasyTrak – Installation Recommendations

Device fastening

Locate the battery in your vehicle. If present remove the battery cover to access the battery.





There is a double-sided tape on the back of the device, use it to attach the device on or around the battery, so that the GNSS antenna and LEDs indicators are facing up.

Connecting the Wiring

The Red device power wire is designed to be directly connected to the positive terminal fastener of the vehicle battery.

The Black device ground wire is designed to be directly connected to the negative terminal fastener of the vehicle battery.

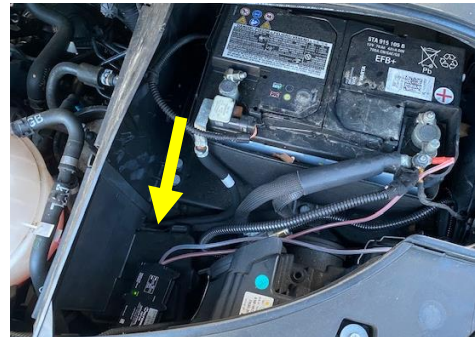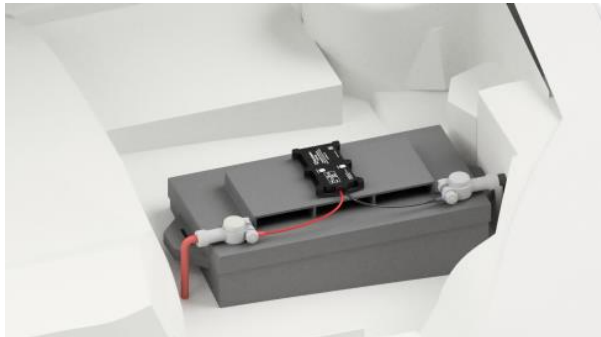

LED Status

Navigation LED

- Blinking every second – Normal Mode.
- Blink fast Constantly – Firmware Update.
- Permanently ON – No GPS lock.
- Permanently OFF – Sleep Mode

Status LED

- Blinking every second – Normal Mode.
- Blinking every Two seconds – Sleep Mode
- Blinking for a short time – Modem activity
- Permanently OFF – Boot Mode

